

**THE 1999 SUMMER WATERTEMPERATURE
AND FLOW MANAGEMENT PROJECT**

*NECHAKO FISHERIES CONSERVATION PROGRAM
Technical Report No. RM99-1*

Prepared by:
Triton Environmental Consultants Ltd.
February 2001

Contents

List of Figures	<i>i</i>
List of Tables	<i>ii</i>
List of Appendices	<i>iii</i>
ABSTRACT	1
INTRODUCTION	1
METHODS	3
RESULTS	5
DISCUSSION	9
Observed Data	
Occurrences of Water Temperatures in the Nechako River above Stuart River Confluence Exceeding Water Temperature Criterion	
Volume of Water Used	
Application of the Summer Water Temperature and Flow Management Project Release Criteria	
REFERENCES	12
APPENDICES	

List of Figures

Figure 1	Nechako River Study Area	2
Figure 2	Observed Mean Daily Temperatures in the Nechako River Above the Stuart River Confluence, July 10 to August 20, 1999	8
Figure 3	Skins Lake Spillway Releases and Flows in the Nechako River Below Cheslatta Falls and at Vanderhoof, July 10 to September 6, 1999	9
Figure 4	Flows in the Nechako River below Cheslatta Falls Resulting From Skins Lake Spillway Releases, July 10 to August 20, 1999	11

List of Tables

Table 1	Daily Operations to Manage Water Temperatures in the Nechako River Above the Stuart River Confluence	4
Table 2	Predicted and Observed Mean Daily Water Temperatures in the Nechako River Above the Stuart River Confluence, July 10 to August 20, 1999	6
Table 3	Observed Mean Daily Water Temperatures in the Nechako River Above the Stuart River Confluence, July 10 to August 20, 1999	8
Table 4	Rationale for Skins Lake Spillway Release Changes, July 10 to September 6, 1999	10

List of Appendices

- Appendix A Numerical Example of Water Temperature Trend Calculation
- Appendix B Mean Daily Water Temperatures in the Nechako and Nautley Rivers, 1999
- Appendix C Mean Daily Skins Lake Spillway Releases and Flows in the Nechako and Nautley Rivers, 1999
- Appendix D Observed and Forecast Meteorological Data
- Appendix E Summer Water Temperature and Flow Management Project Reservoir Release Volume Calculations for July 10 to August 20, 1999

ABSTRACT

The 1999 Nechako River Summer Water Temperature and Flow Management Project (the Project) was undertaken to attempt to prevent mean daily water temperatures in the Nechako River above the Stuart River confluence (at Finmoore) from exceeding 20.0°C (68.0°F) during July 20 to August 20. Water temperatures were managed by regulating Skins Lake Spillway releases to control flows in the Nechako River below Cheslatta Falls and at Vanderhoof. In 1999, mean daily water temperatures in the Nechako River above the Stuart River confluence exceeded 20.0°C (68.0°F) on three days (August 6 to 8) during July 20 to August 20, with a maximum mean daily temperature of 20.9°C (69.6°F) recorded on August 7. During the period of August 6 to 8, flow in the Nechako River below Cheslatta Falls was approaching the maximum allowable level of 283 m³/s (10,000 cfs), and thus no further action could be taken.

Over the duration of the 1999 Summer Water Temperature and Flow Management Project (July 10 to August 20), the total volume of water released was 7,241.2 m³/s-d, (255,723 cfs-d), and the average release during the Project was 172.4 m³/s (6,089 cfs).


INTRODUCTION

Control of the Nechako River water temperature for protection of fish resources is a concern of both government agencies and Alcan Smelters and Chemicals Ltd. (Alcan). Each summer between 1981 and 1984, Alcan, Triton Environmental Consultants Ltd. (Triton, formerly Envirocon Pacific Ltd.), and the Department of Fisheries and Oceans (DFO) undertook a joint water temperature monitoring and control project. In 1985, no water temperature monitoring and control project was implemented as Alcan maintained a constant Skins Lake Spillway (SLS) release of 283 m³/s (10,000 cfs) providing the maximum allowable flow in the Nechako River below Cheslatta Falls for the entire period of concern. In 1986 and 1987, an independent water temperature and flow management project similar to the one used during the summer of 1984 (Envirocon 1985) was carried out. Since 1988, analogous water temperature and flow management projects (Triton 1995a through 1995h, Triton 1996, Triton 1997, Triton 1998) have been carried out under the auspices of the Nechako Fisheries Conservation Program (NFCP).

The Nechako River Summer Water Temperature and Flow Management Project (the Project) currently in place was designed and developed in 1982 and has been successfully implemented since 1983. The objective of the Project is to attempt to prevent mean daily water temperatures in the Nechako River above


the Stuart River confluence (at Finmoore) from exceeding 20.0°C (68.0°F). This objective is met by regulating releases from the Skins Lake Spillway to control flows in the Nechako River below Cheslatta Falls and at Vanderhoof. The Project operates from July 10 to August 20 (the operational period) with the goal of managing water temperatures in the Nechako River at Finmoore between July 20 and August 20 (the water temperature control period, hereafter referred to as the control period). Flows in the Nechako River at Cheslatta Falls are also to be reduced to fall spawning flows by early September. These dates may vary as directed by the NFCP in accordance with the timing of sockeye runs in the system. The Project study area is shown in Figure 1. Unless otherwise stated, references to water temperatures, flows (including releases) and meteorological data are mean daily values, and the location of the Nechako River above the Stuart River confluence refers to the Nechako River at Finmoore.

This report reviews the 1999 Summer Water Temperature and Flow Management Project and includes an outline of Triton's method of determining Skins Lake Spillway releases, a summary of Triton's 1999 Skins Lake Spillway release recommendations for the period July 10 to September 6 inclusive, and a summary of observed flows (July 10 to September 6) and water temperatures (July 10 to August 20) at various locations along the Nechako River. Also discussed is the volume of cooling water used in the 1999 Summer Water Temperature and Flow Management Project.

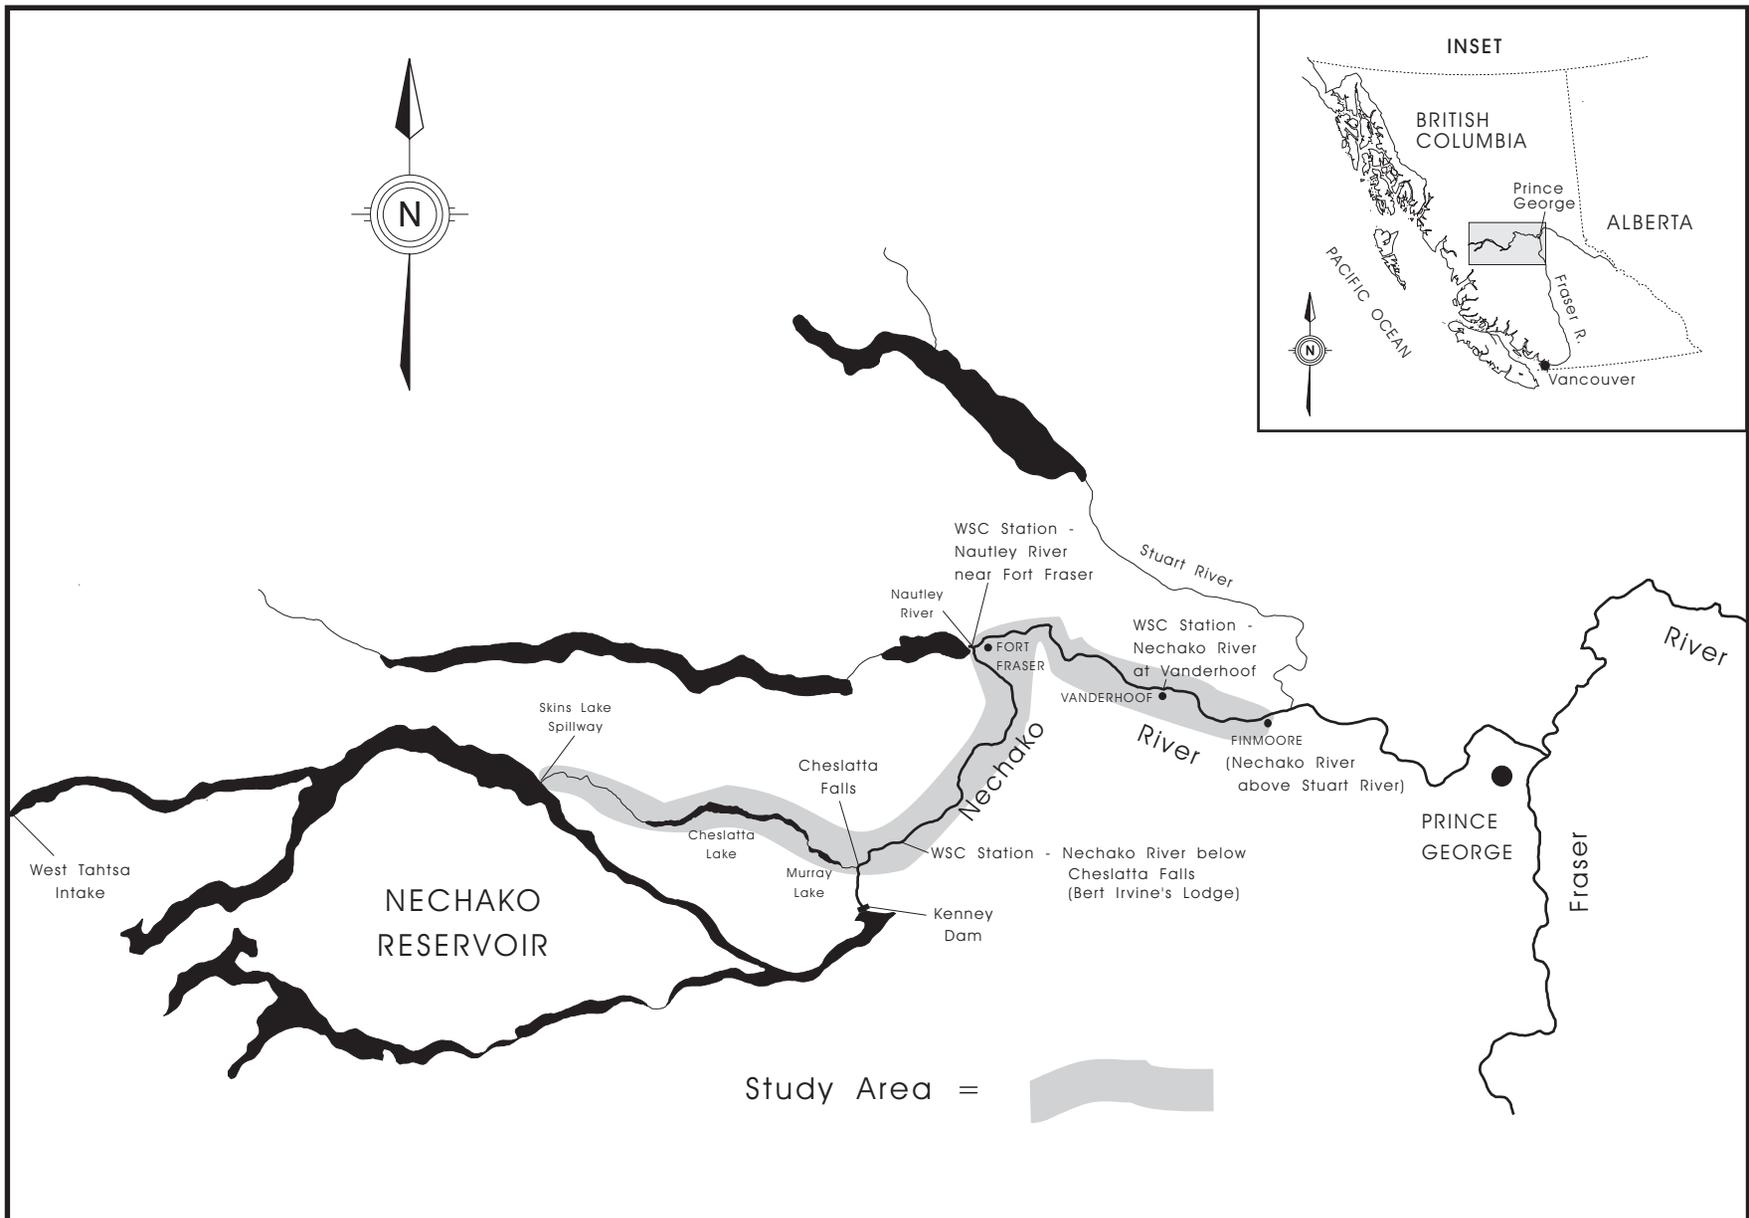

Nechako Fisheries Conservation Program Map # RM99-1-11

FIGURE 1. NECHAKO RIVER STUDY AREA

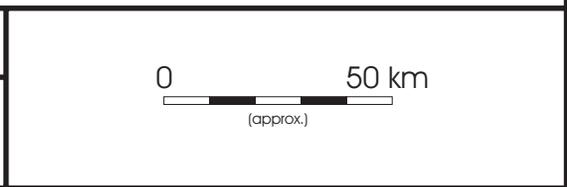

METHODS

The management of the Nechako River flows and water temperatures was accomplished using water temperature predictions based on five-day meteorological forecasts to determine the schedule of Skins Lake Spillway releases required to meet project objectives. The Summer Water Temperature and Flow Management Project uses an unsteady-state flow routing model and an unsteady-state water temperature prediction model designed to compute the conditions in the Nechako River defined by the nature of the meteorological conditions. Numerical modelling of flows and water temperatures in the Nechako River was performed daily during the entire operational period.

Daily operations followed the protocol defined in the Settlement Agreement (Anon. 1987), and involved collection of water temperature and river stage data from several locations in the study area, and development of five-day meteorological forecasts. Water temperatures were obtained daily from recorders maintained in the Nechako River below Cheslatta Falls (at Bert Irvine's Lodge), in the Nechako River at Fort Fraser (upstream of the Nautley River), in the Nechako River above the Stuart River confluence and in the Nautley River. River stages were obtained daily from recorders maintained in the Nechako River below Cheslatta Falls, in the Nechako River at Vanderhoof and from a staff gauge in the Nautley River. Five-day meteorological forecasts were obtained from World Weatherwatch, a subconsultant to Triton.

River stage and minimum and maximum water temperature data were obtained daily by Triton (staff member resident in Vanderhoof) for each location identified except the Nechako River below Cheslatta Falls. Each morning, hourly water temperature and river stage data recorded by the data collection platform located on the Nechako River below Cheslatta Falls were obtained via computer link to Water Survey of Canada (WSC), Vancouver. In addition, spot and corresponding recorded water temperatures were collected at each location during these daily site visits and used to adjust the recorded water temperatures. The adjustment provided an ongoing check of each thermograph, and was performed in the following manner. If the spot temperature was higher than the thermograph record, the thermograph record was adjusted to agree with the observed spot temperature for that day. If the thermograph record was higher than the spot temperature, the thermograph record

was not adjusted. This procedure was implemented as a conservative measure.

Skins Lake Spillway releases reported are as requested by Triton. All Nechako River and Nautley River flow data reported are preliminary data, and are part of the database utilized in the daily operation of the Summer Water Temperature and Flow Management Project. These data are not updated as it is the preliminary data that was used in real-time modelling of the Nechako River system. Therefore, values presented may differ slightly from those reported by WSC.

The first 10 days of the operational period, July 10 to July 19, were utilized for system start up, for initialization of the database required to schedule Skins Lake Spillway releases necessary to meet project water temperature objectives during the control period commencing July 20, and to increase flows in the Nechako River from spring flows to the minimum cooling flow of $170 \text{ m}^3/\text{s}$ (6,000 cfs) required below Cheslatta Falls. The 1999 Skins Lake Spillway spring base release as determined by NFCP was $49.0 \text{ m}^3/\text{s}$ (1,730 cfs). Upon commencement of the operational period on July 10, the observed flow in the Nechako River below Cheslatta Falls was $57.0 \text{ m}^3/\text{s}$ (2,013 cfs). On July 10, 1999, the Skins Lake Spillway release was increased from the spring base release to $227 \text{ m}^3/\text{s}$ (8,000 cfs) to ensure flows in the Nechako River below Cheslatta Falls reached the minimum cooling flow of $170 \text{ m}^3/\text{s}$ (6,000 cfs) by July 20 (the beginning of the water temperature control period).

Throughout the operational period, water temperatures in the Nechako River were calculated daily for the previous day, the current day and each of the next four days. These calculations were based on observed and five-day forecast meteorological data, observed water temperature and computed flow data. Forecast water temperature predictions were tabulated and reviewed daily to identify trends in water temperature changes. These trends are the same as those used in the water temperature and flow management projects since 1984 (Envirocon Ltd. 1985), and are best explained through reference to Table 1. Assuming the current day is July 16, entries corresponding to the current day's operation are represented by the letter *c*. Entries *co* and *cs* represent the observed and calculated water temperatures, respectively, for the previ-

Table 1
Daily Operations to Manage Water Temperatures in the Nechako River Above the Stuart River Confluence

Date	11-Jul	12-Jul	13-Jul	14-Jul	15-Jul	16-Jul*	17-Jul	18-Jul	19-Jul	20-Jul
Fifth Day's Predicted Water Temperature @ Date + 4 Days								a5	b5	c5
Fourth Day's Predicted Water Temperature @ Date + 3 Days							a4	b4	c4	
Third Day's Predicted Water Temperature @ Date + 2 Days						a3	b3	c3		
Second Day's Predicted Water Temperature @ Date + 1 Day					a2	b2	c2			
Current Day's Predicted Water Temperature @ Date				a1	b1	c1				
Previous Day's Calculated Water Temperature @ Date - 1 Day		as	bs	cs						
Previous Day's Observed Water Temperature @ Date - 1 Day		ao	bo	co						
Current Day's Release @ Date			ra	rb	rc					

—————→ observed trend
 - · - · - · → predicted trend
 - - - - - → forecast trend

* The current day (e.g., the day of operation) for this example is July 16.

ous day (July 15). Entries *c1* through *c5* represent predicted water temperatures computed using the current day's five-day meteorological forecast and an assumed current day's flow regime. The entry *rc* represents the current day Skins Lake Spillway release required to meet project objectives.

The following three trends in water temperature changes were reviewed on a day-by-day basis:

1. Observed trend; developed from observed mean daily water temperatures measured in the Nechako River above the Stuart River confluence each day (*bo* and *co* in Table 1). The difference in observed water temperatures for the previous 2 days is extrapolated over the next 5 days to determine the observed water temperature trend.
2. Predicted trend; developed from the predicted water temperatures for the previous day and the following 5 days (*cs, c1, c2, c3, c4, c5*, in Table 1). These data represent the predicted trend.

-
3. Forecast trend; developed from the difference between the current 5 day and previous 5 day predictions for the same calendar days (*c3* and *b4*, *c2* and *b3*, *c1* and *b2* in Table 1). Differences between forecasted data on coincident dates for the current day and the next 2 days only are averaged and added to the 5th day predicted temperature to determine the trend in forecasted temperatures.

A numerical example of how the trends are calculated is presented in Appendix A.

Each day predicted water temperatures for the five day forecast period were checked and the three trends were calculated. If two of the three trends indicated that the water temperature in the Nechako River above the Stuart River confluence could potentially exceed 19.4°C (67.0°F) then an increase in the Skins Lake Spillway release was required. When this occurred the current day's release was revised and the flow and temperature models were rerun using the modified flow regime. Results of each day's final computer run were subsequently used to initialize water temperatures for the following day's computations. Entries in Table 1 represent each day's final cooling water release and resultant predicted water temperatures.

The following release criteria were used with the three trends identified above to determine the timing and magnitude of Skins Lake Spillway releases:

1. When two of the three trends show an increase in water temperature in the Nechako River above the Stuart River confluence, and these trends show that potentially the water temperature could exceed 19.4°C (67.0°F), increase the Skins Lake Spillway release according to criteria 2 and 3 below.
2. Operate Skins Lake Spillway such that flow in the Nechako River below Cheslatta Falls ranges between 170 m³/s (6,000 cfs) and 283 m³/s (10,000 cfs) as required, and flow in the Nechako River above the Stuart River confluence does not exceed 340 m³/s (12,000 cfs). It is understood that the flow in the Nechako River below Cheslatta Falls is to be not less than 170 m³/s (6,000 cfs) by the beginning of the control period, and is to be reduced to approximately 31.2 m³/s (1,100 cfs) by September 6.
3. At any time of release, increase Skins Lake Spillway from the current level to 453 m³/s (16,000 cfs) to achieve the flow changes in the Nechako River as fast as possible.
4. During cooling periods when two of three trends in forecasted water temperatures are decreasing and these trends indicate that potentially the water temperature could drop below 19.4°C (67.0°F) within the forecast period (5 days), reduce the Skins Lake Spillway release from the current level to 14.2 m³/s (500 cfs).

RESULTS

Predicted and observed mean daily water temperatures for the Nechako River above the Stuart River, Skins Lake Spillway releases and changes in Skins Lake Spillway releases over the duration of the Project operational period are summarized in Table 2.

Observed mean daily water temperatures in the Nechako River above the Stuart River confluence are tabulated in Table 3 and plotted in Figure 2. The respective maximum and minimum mean daily water temperatures recorded during the control period were 20.9°C (69.6°F) on August 7 and 16.3°C (61.4°F) on August 18. A summary of mean daily water temperatures recorded during the Project in the Nechako River below Cheslatta Falls, near Fort Fraser and above the Stuart River confluence, and in the Nautley River near Fort Fraser is presented in Appendix B.

As outlined in the Methods section, Skins Lake Spillway releases required for water temperature control were regulated during the control period to ensure flows in the Nechako River below Cheslatta Falls were to range between 170 m³/s (6,000 cfs) and 283 m³/s (10,000 cfs) and flows at Vanderhoof were not to exceed 340 m³/s (12,000 cfs).

Skins Lake Spillway releases and their corresponding flows in the Nechako River below Cheslatta Falls and at Vanderhoof are plotted in Figure 3. Daily Skins Lake Spillway releases, Nautley River flows and flows

Table 2
Predicted and Observed Mean Daily Water Temperatures in the Nechako River Above the Stuart River Confluence, July 10 to August 20, 1999

Date	JULY																					
	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
5th Day's Predicted Water Temperature at Date + 4 Days					20.1	18.3	18.9	18.3	18.5	18.6	18.2	18.1	17.7	18.1	18.3	18.7	19.2	18.6	17.7	17.5	17.8	18.5
4th Day's Predicted Water Temperature at Date + 3 Days				19.9	18.4	18.6	17.5	17.5	17.6	17.6	18.3	18.0	18.3	18.4	18.7	18.7	18.3	17.8	17.4	17.5	17.9	18.4
3rd Day's Predicted Water Temperature at Date + 2 Days			20.4	19.1	18.7	17.3	16.7	16.0	16.8	18.2	18.4	19.0	18.6	19.3	18.5	17.7	17.7	17.4	17.4	17.9	17.4	17.9
2nd Day's Predicted Water Temperature at Date + 1 Day		21.6	19.6	19.4	17.7	17.0	15.1	15.8	17.9	18.6	19.9	19.0	19.9	18.9	17.3	17.5	17.3	17.2	18.2	17.0	16.9	17.2
Current Day's Predicted Water Temperature at Date	21.7	19.1	19.9	18.5	18.0	15.9	15.6	17.1	18.1	19.7	19.8	20.2	19.8	17.7	17.8	17.6	17.2	18.0	17.2	16.5	17.0	17.3
Previous Day's Calculated Water Temperature at Date - 1 Day	20.5	19.3	19.3	18.7	17.3	16.0	16.3	17.2	18.5	19.6	20.1	20.2	19.1	18.2	17.8	17.5	17.5	17.5	17.0	16.8	17.0	17.2
Previous Day's Observed Water Temperature at Date - 1 Day	18.2	18.9	18.7	18.4	17.2	16.5	15.8	16.3	17.6	18.6	19.8	19.8	19.1	17.8	17.7	17.3	17.1	17.1	17.0	16.3	16.5	16.6
Current Day's Skins Lake Spillway Release at Date (m ³ /s)	49.0	49.0	227	227	227	227	227	227	227	227	170	170	453	14.2	14.2	170	170	170	170	170	170	170
		to								to		to		to								
		227								170		453	14.2		170							
		@								@		@	@		@							
		1600								1000		1600	1600		1000							
		hrs								hrs		hrs	hrs		hrs							

Table 2 (continued)
Predicted and Observed Mean Daily Water Temperatures in the Nechako River Above the Stuart River Confluence, July 10 to August 20, 1999

Date	AUGUST																			
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
5th Day's Predicted Water Temperature at Date + 4 Days	19.2	19.3	18.3	18.1	18.5	18.9	19.1	18.9	19.9	19.0	19.0	19.1	18.8	18.8	18.3	18.1	18.0	18.7	18.1	17.8
4th Day's Predicted Water Temperature at Date + 3 Days	18.8	18.1	17.7	18.1	19.1	19.5	18.9	20.4	19.8	19.6	19.2	18.6	18.5	17.7	17.9	17.8	18.6	18.0	17.7	18.0
3rd Day's Predicted Water Temperature at Date + 2 Days	17.6	17.5	17.6	18.9	19.7	19.5	20.8	20.5	20.4	19.7	18.8	18.6	17.1	17.0	17.8	18.8	17.8	17.6	18.1	18.1
2nd Day's Predicted Water Temperature at Date + 1 Day	17.4	17.5	18.7	19.7	20.1	21.1	21.0	20.9	20.5	19.1	19.0	17.7	16.3	17.6	19.3	18.1	17.5	18.3	18.3	19.4
Current Day's Predicted Water Temperature at Date	17.4	18.3	19.4	19.7	20.6	21.3	21.2	20.9	19.9	19.5	19.0	17.2	17.5	18.7	18.7	17.7	18.1	18.3	18.9	19.1
Previous Day's Calculated Water Temperature at Date - 1 Day	17.6	18.5	19.3	19.7	20.7	21.2	21.2	20.7	20.1	19.6	18.7	17.7	17.7	18.4	18.4	17.9	17.9	18.4	18.7	
Previous Day's Observed Water Temperature at Date - 1 Day	17.1	18.2	18.3	19.1	20.0	20.8	20.9	20.6	19.8	19.3	18.9	17.6	17.3	17.9	18.1	17.8	18.0	17.8	18.1	18.7
Current Day's Skins Lake Spillway Release at Date (m ³ /s)	170	170	170	453	14.2	453	453	283	14.2	14.2	14.2	170	170	170	170	170	170	14.2	14.2	14.2
			to	to	to		to	to			to						to			
			453	14.2	453		283	14.2			170						14.2			
			@	@	@		@	@			@						@			
			1600	1600	1600		1400	1600			900						1600			
			hrs	hrs	hrs		hrs	hrs			hrs						hrs			

Table 3
Observed Mean Daily Water Temperatures in the Nechako River Above
the Stuart River Confluence, July 10 to August 20, 1999

Date	Water Temperature (°C)	Date	Water Temperature (°C)
10-Jul	18.2	01-Aug	17.1
11-Jul	18.9	02-Aug	18.2
12-Jul	18.7	03-Aug	18.3
13-Jul	18.4	04-Aug	19.1
14-Jul	17.2	05-Aug	20.0
15-Jul	16.5	06-Aug	20.8
16-Jul	15.8	07-Aug	20.9
17-Jul	16.3	08-Aug	20.6
18-Jul	17.6	09-Aug	19.8
19-Jul	18.6	10-Aug	19.3
20-Jul	19.8	11-Aug	18.9
21-Jul	19.8	12-Aug	17.6
22-Jul	19.1	13-Aug	17.3
23-Jul	17.8	14-Aug	17.9
24-Jul	17.7	15-Aug	18.1
25-Jul	17.3	16-Aug	17.8
26-Jul	17.1	17-Aug	18.0
27-Jul	17.1	18-Aug	17.8
28-Jul	17.0	19-Aug	18.1
29-Jul	16.3	20-Aug	18.7
30-Jul	16.5		
31-Jul	16.6		

Figure 2
Observed Mean Daily Temperatures in the Nechako River Above
the Stuart River Confluence, July 10 to August 20, 1999


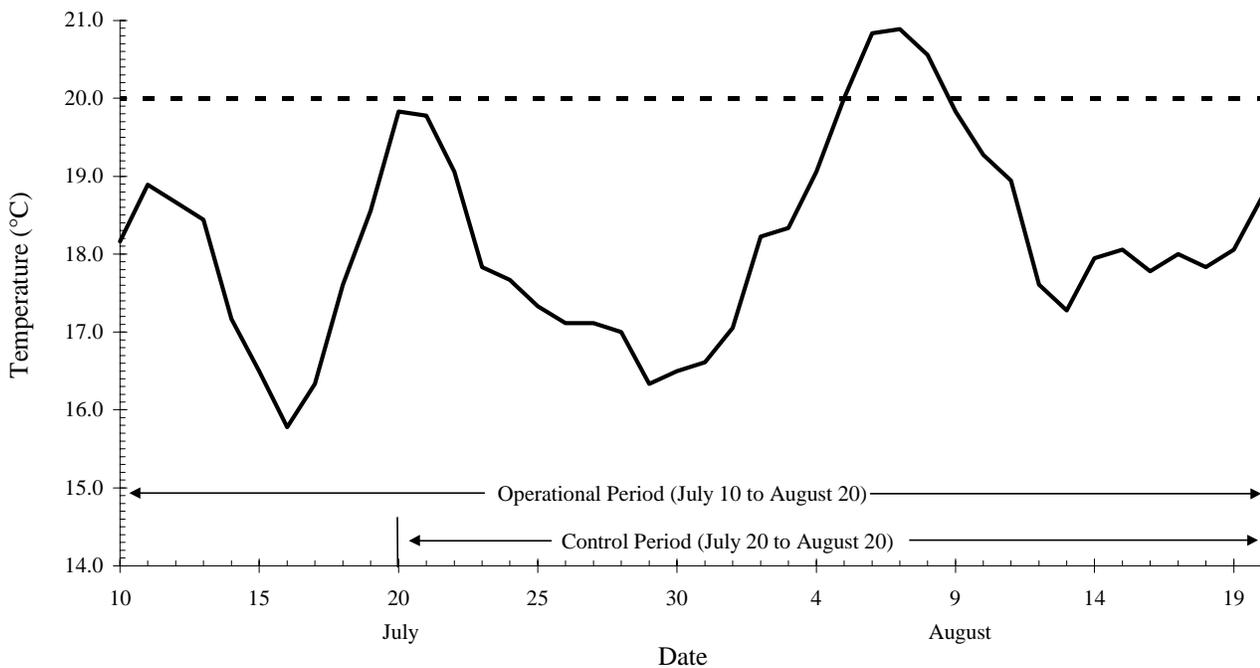


Figure 3
Skins Lake Spillway Releases and Flows in the Nechako River Below
Cheslatta Falls and at Vanderhoof, July 10 to September 6, 1999

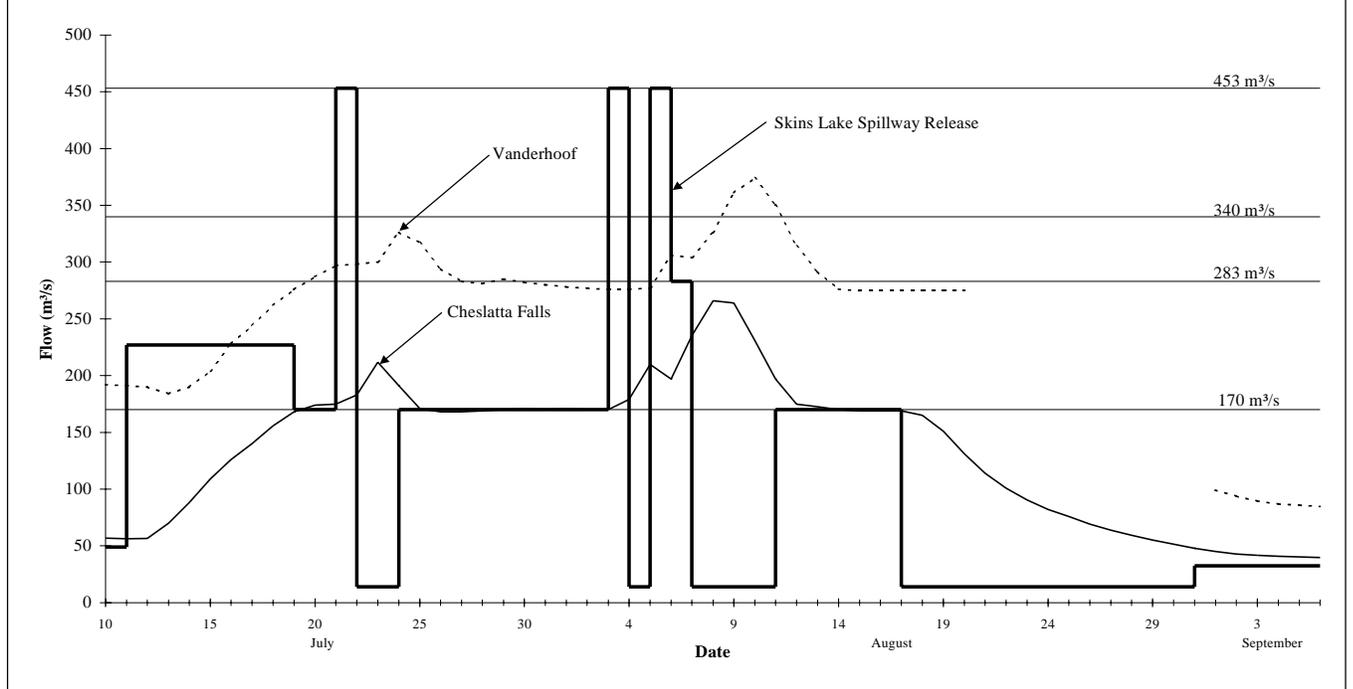

in the Nechako River below Cheslatta Falls and at Vanderhoof are tabulated in Appendix C. A record of Skins Lake Spillway release changes during the Project and the reasoning behind them is presented in Table 4.

During the control period, measured flows in the Nechako River below Cheslatta Falls (based on preliminary WSC data from the WSC data collection platform at Bert Irvine's Lodge) ranged between a maximum of 266 m³/s (9,394 cfs) on August 8 and a minimum of 131 m³/s (4,626 cfs) on August 20. Flows measured in the Nechako River at Vanderhoof ranged between a maximum of 374 m³/s (13,208 cfs) on August 10 and a minimum of 275 m³/s (9,712 cfs) on August 20. Following the control period, the mean daily flow in the Nechako River below Cheslatta Falls was reduced to approximately 31.2 m³/s (1,100 cfs) by September 6. The recorded maximum mean daily flow in the Nechako River at Vanderhoof exceeded

the previously stated limit for flood control by 9% due to high tributary inflow.

DISCUSSION

Decision criteria used to determine Skins Lake Spillway releases during the 1999 Summer Water Temperature and Flow Management Project were identical to those used during summer water temperature and flow management projects since 1984. The discussion of the 1999 Summer Water Temperature and Flow Management Project has been divided into four sections. The first section reviews the collection and use of observed field data. Variables measured include water temperature, flow, and meteorological data (observed and forecast). The second section discusses occurrences of mean daily water temperatures in excess of 20.0°C (68.0°F) in the Nechako River above the Stuart River confluence. The third section discusses the volume of water used during the 1999 Summer Water Temperature and Flow Management Project. The fourth section discusses instances when judgment was exercised during the application of the release criteria. This was based on experience gained in pre-

Table 4
Rationale for Skins Lake Spillway Release Changes, July 10 to September 6, 1999

Date 1999	Old Setting (m ³ /s)	New Setting (m ³ /s)	Time of Change (hrs)	Reason for Changing SLS Release Setting
11-Jul	49.0	227	1600	To ensure base flow of 170 m ³ /s in the Nechako River below Cheslatta Falls by July 20
19-Jul	227	170	1000	To maintain base flow of 170 m ³ /s
21-Jul	170	453	1600	In response to a predicted warming trend
22-Jul	453	14.2	1600	In response to a predicted cooling trend
24-Jul	14.2	170	1000	To maintain base flow of 170 m ³ /s
03-Aug	170	453	1600	In response to a predicted warming trend
04-Aug	453	14.2	1600	In response to a predicted cooling trend
05-Aug	14.2	453	1600	In response to a predicted warming trend
07-Aug	453	283	1400	To avoid exceedence of 283 m ³ /s in the Nechako River below Cheslatta Falls
08-Aug	283	14.2	1600	In response to a predicted cooling trend
11-Aug	14.2	170	0900	To maintain base flow of 170 m ³ /s
17-Aug	170	14.2	1600	In response to a predicted cooling trend
31-Aug	14.2	32.7	1600	To achieve spawning flow in the Nechako River below Cheslatta Falls by September 6

vious years' operation of the Summer Water Temperature and Flow Management Project.

Observed Data

Triton's modelling procedure is based on the premise that the best way to forecast water temperatures is to initialize computations with observed conditions. For this reason, the quality of the field data used in the modelling process directly affects the accuracy of the computed water temperatures. Therefore, data must be collected accurately and consistently to ensure that random errors are kept to a minimum. Consistency in data collection techniques also ensures a constant bias throughout the project.

In 1999, flow data obtained from gauging stations in the Nechako River below Cheslatta Falls, in the Nechako River at Vanderhoof and in the Nautley River

near Fort Fraser appeared to be accurate. Flows in the Nechako River below Cheslatta Falls and at Vanderhoof responded as expected in response to Skins Lake Spillway releases. The Nautley River flow regime was above average for the time of year. The ability to obtain hourly stage data from the gauging station located on the Nechako River below Cheslatta Falls proved very useful in verifying the daily predictions of the flow model and accounting for changes in the local inflow to the Cheslatta/Murray Lakes system.

As previously stated, spot and corresponding recorder (thermograph) water temperatures were collected in the Nechako River at Fort Fraser (upstream of the Nautley River), in the Nechako River above the Stuart River confluence and in the Nautley River during each site visit. The thermograph water temperatures were not consistently higher or lower than their associated spot temperatures. These data were used to adjust

water temperatures and the method applied was that outlined in the Methods section of this report.


Observed and forecast meteorological data were obtained daily from World Weatherwatch, a subconsultant to Triton. These forecast weather data obtained from World Weatherwatch were developed from observed weather data acquired from the Atmospheric Environmental Service (AES) station at Prince George Airport and from the meteorological monitoring station installed by Triton at Fort Fraser. The observed and forecast weather data were used to estimate water temperatures in the Nechako River below Cheslatta Falls and in the Nautley River for the current day and following four days. A listing of the observed and forecast meteorological data is provided in Appendix D.

Occurrences of Water Temperatures in the Nechako River above the Stuart River Confluence Exceeding Water Temperature Criterion

Mean daily water temperatures in the Nechako River above the Stuart River confluence exceeded 20.0°C (68.0°F) on three days (August 6 to 8) during the control period, with a maximum mean daily temperature of 20.9°C (69.6 °F) recorded on August 7. During this period, flow in the Nechako River below Cheslatta Falls was approaching the maximum allowable level of 283 m³/s (10,000 cfs), and thus no further action could be taken. Prior to the water temperature control period, mean daily water temperatures in the Nechako River above the Stuart River confluence did not exceed 20.0°C (68.0°F).

Volume of Water Used

Figure 4 presents the observed flows in the Nechako River below Cheslatta Falls for the 1999 Summer Water Temperature and Flow Management Project. Also indicated is the minimum cooling flow of 170 m³/s

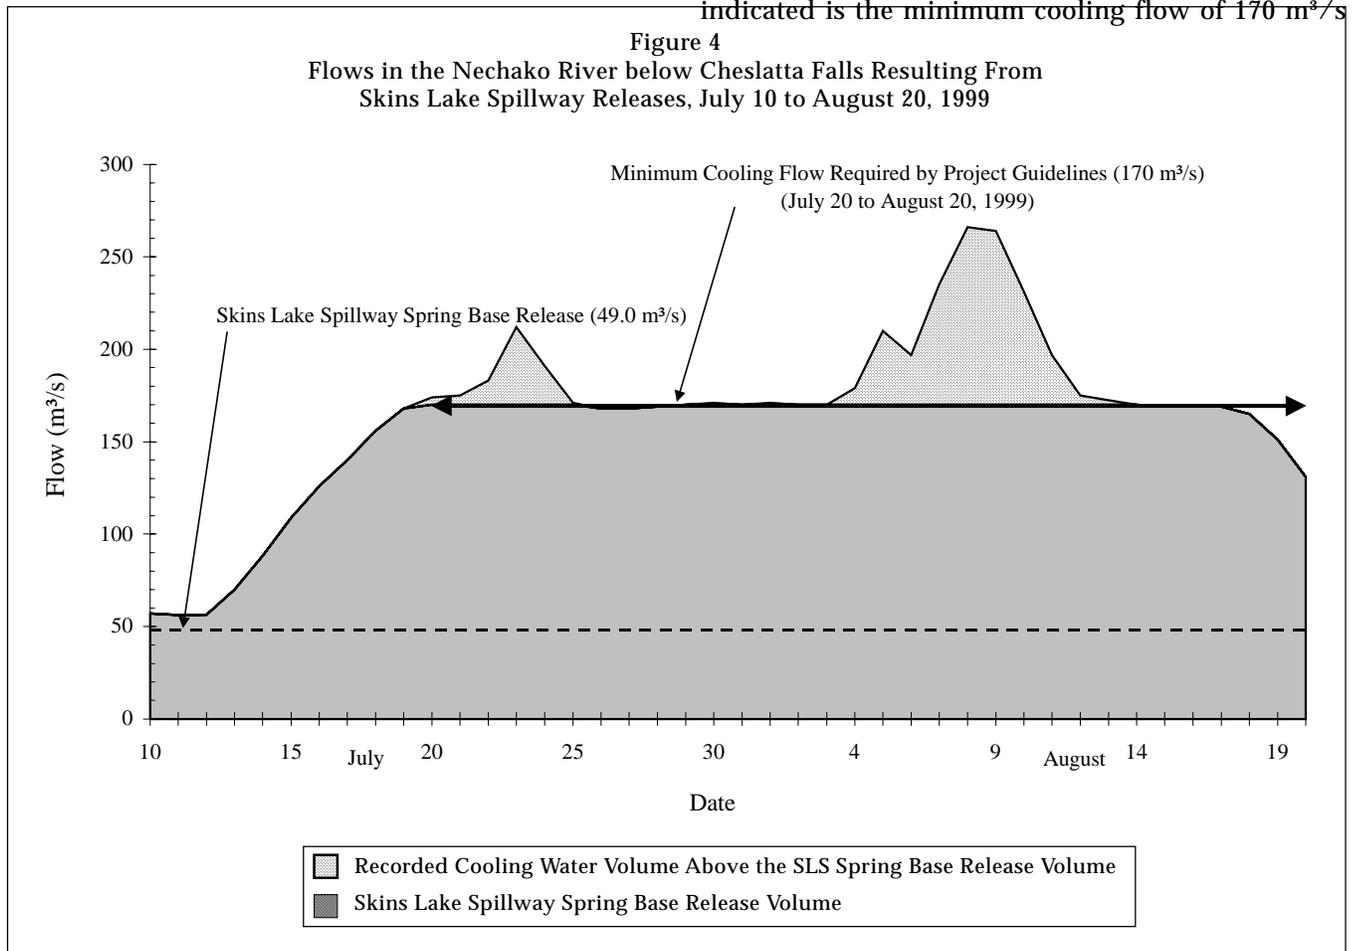

(6,000 cfs) in the Nechako River below Cheslatta Falls, and the Skins Lake Spillway release of 49.0 m³/s (1,730 cfs) as determined by the NFCP Technical Committee as part of the “Annual Water Allocation” defined in the Settlement Agreement. Skins Lake Spillway releases in excess of 49.0 m³/s (1,730 cfs) are considered releases used for cooling purposes.

The total volume of water released during the 1999 Summer Water Temperature and Flow Management Project operational period was 7,241.2 m³/s-d (255,723 cfs-d). The volume released for cooling purposes was 5,183.2 m³/s-d (183,045 cfs-d), and is based on an assumed Skins Lake Spillway release of 49.0 m³/s (1,730 cfs) for the period July 10 to August 20, inclusive. The average release during the operational period was 172.4 m³/s (6,088.6 cfs). Volume calculations are presented in Appendix E.

Application of the Summer Water Temperature and Flow Management Project Release Criteria

The Summer Water Temperature and Flow Management Project is very sensitive to the accuracy of meteorological forecasting. If an increase or decrease in temperature occurs over a prolonged period of time (3 or 4 days), inaccurate meteorological forecasts may predict the reversal of the temperature change prematurely. In these instances, it may be required to exercise judgment when applying the Summer Water Temperature and Flow Management Project release criteria used with the three water temperature trends. Experience gained in the operation of the Summer Water Temperature and Flow Management Project since 1984 has helped to develop the judgment required to make exceptions to the release criteria during such events, which has proven to be beneficial in the management of downstream water temperatures. No exceptions were made to the application of the release criteria during the entire operational period.

REFERENCES

Anon. 1987. Settlement Agreement 1987.

Envirocon Limited. 1985. Review of the 1984 Nechako River Hydrothermal Monitoring and Control Program. Technical Memorandum 1941/C. Chapter 2.0, Methods. Prepared for Alcan Smelters and Chemicals Ltd.

Triton Environmental Consultants Ltd. 1995a. The 1988 Summer Water Temperature and Flow Management Project. Nechako Fisheries Conservation Program Technical Report No. RM88-5.

Triton Environmental Consultants Ltd. 1995b. The 1989 Summer Water Temperature and Flow Management Project. Nechako Fisheries Conservation Program Technical Report No. RM89-2.

Triton Environmental Consultants Ltd. 1995c. The 1990 Summer Water Temperature and Flow Management Project. Nechako Fisheries Conservation Program Technical Report No. RM90-2.

Triton Environmental Consultants Ltd. 1995d. The 1991 Summer Water Temperature and Flow Management Project. Nechako Fisheries Conservation Program Technical Report No. RM91-2.

Triton Environmental Consultants Ltd. 1995e. The 1992 Summer Water Temperature and Flow Management Project. Nechako Fisheries Conservation Program Technical Report No. RM92-2.

Triton Environmental Consultants Ltd. 1995f. The 1993 Summer Water Temperature and Flow Management Project. Nechako Fisheries Conservation Program Technical Report No. RM93-2.

Triton Environmental Consultants Ltd. 1995g. The 1994 Summer Water Temperature and Flow Management Project. Nechako Fisheries Conservation Program Technical Report No. RM94-1.

Triton Environmental Consultants Ltd. 1995h. The 1995 Summer Water Temperature and Flow Management Project. Nechako Fisheries Conservation Program Technical Report No. RM95-2.

Triton Environmental Consultants Ltd. 1996. The 1996 Summer Water Temperature and Flow Management Project. Nechako Fisheries Conservation Program Technical Report No. RM96-1.

Triton Environmental Consultants Ltd. 1997. The 1997 Summer Water Temperature and Flow Management Project. Nechako Fisheries Conservation Program Technical Report No. RM97-1.

Triton Environmental Consultants Ltd. 1998. The 1998 Summer Water Temperature and Flow Management Project. Nechako Fisheries Conservation Program Technical Report No. RM98-1.

APPENDIX A

Numerical Example of Water Temperature Trend Calculation

Appendix A
Numerical Example of Water Temperature Trend Calculation

From data for July 16 date of operation (Table A1).

1. Observed Trend

The observed trend is down by 0.7°C from 17.2°C (J14) to 16.5°C (J15). Take the previous day's observed temperature 16.5°C (J15) and extrapolate the trend for 5 days at -0.7°C . The observed trend shows that the water temperature could potentially reach $16.5^{\circ}\text{C} + 5(-0.7^{\circ}\text{C}) = 13.0^{\circ}\text{C}$.

2. Predicted Trend

The predicted trend is the difference between the previous day's calculated water temperature (J15) and the fifth day predicted water temperature (J20). The predicted trend is up from 15.6°C to 18.2°C with the potential to reach 18.2°C .

3. Forecast Trend

The forecast trend for the current day of July 16 is based on the first, second and third day forecasts.

July 16 15.1 to 15.6 = up 0.1°C

July 17 16.0 to 15.8 = down 0.2°C

July 18 17.6 to 16.8 = down 0.8°C

Mean of 3 differences = down 0.3°C

This mean of -0.3°C is added to the fifth day predicted water temperature to give $18.2^{\circ}\text{C} + (-0.3^{\circ}\text{C}) = 17.9^{\circ}\text{C}$.

The forecast trend is down 0.3°C with the potential to reach 17.9°C .

APPENDIX B

Mean Daily Water Temperatures in the Nechako and Nautley Rivers, 1999

Appendix B
Mean Daily Water Temperatures in the Nechako and Nautley Rivers, 1999

Date	Nechako River			Nautley	Date	Nechako River			Nautley
	Cheslatta Falls (°C)	Fort Fraser (°C)	above the Stuart River (°C)	Fort Fraser (°C)		Cheslatta Falls (°C)	Fort Fraser (°C)	above Stuart River (°C)	Fort Fraser (°C)
10-Jul	15.7	19.0	18.2	15.2	01-Aug	15.5	16.7	17.1	16.8
11-Jul	16.4	18.6	18.9	16.2	02-Aug	15.8	17.3	18.2	17.4
12-Jul	16.1	18.1	18.7	15.9	03-Aug	15.9	18.2	18.3	17.8
13-Jul	15.3	17.5	18.4	16.1	04-Aug	16.3	18.4	19.1	18.8
14-Jul	15.0	16.1	17.2	15.4	05-Aug	16.5	19.0	20.0	20.1
15-Jul	14.3	15.3	16.5	14.2	06-Aug	16.5	19.1	20.8	20.8
16-Jul	14.9	15.4	15.8	15.1	07-Aug	17.1	19.1	20.9	20.5
17-Jul	15.0	16.9	16.3	15.6	08-Aug	17.4	18.8	20.6	20.0
18-Jul	15.8	17.6	17.6	16.3	09-Aug	17.4	18.3	19.8	19.7
19-Jul	16.0	18.3	18.6	17.0	10-Aug	17.6	18.6	19.3	19.8
20-Jul	16.1	18.4	19.8	17.4	11-Aug	17.2	17.6	18.9	18.3
21-Jul	16.1	18.0	19.8	17.8	12-Aug	17.9	17.2	17.6	17.4
22-Jul	15.8	17.0	19.1	17.0	13-Aug	n/a	18.3	17.3	18.0
23-Jul	15.6	16.3	17.8	17.1	14-Aug	17.3	18.5	17.9	18.2
24-Jul	15.7	16.6	17.7	16.9	15-Aug	17.2	17.6	18.1	17.9
25-Jul	15.5	16.3	17.3	16.2	16-Aug	17.1	18.1	17.8	18.2
26-Jul	15.7	16.8	17.1	16.7	17-Aug	16.9	17.8	18.0	17.9
27-Jul	15.7	16.9	17.1	16.7	18-Aug	17.1	18.2	17.8	18.3
28-Jul	15.4	16.1	17.0	16.2	19-Aug	17.1	18.3	18.1	18.8
29-Jul	15.6	16.1	16.3	15.5	20-Aug	n/a	18.4	18.7	18.8
30-Jul	15.5	16.7	16.5	16.1					
31-Jul	15.4	16.7	16.6	16.8					

APPENDIX C

Mean Daily Skins Lake Spillway Releases and Flows in the Nechako and Nautley River, 1999

Appendix C
Mean Daily Skins Lake Spillway Releases and Flows in the Nechako and Nautley River, 1999

Date	Skins Lake Spillway Release (m ³ /s)	Nechako River		Nautley Fort Fraser (m ³ /s)
		Cheslatta Falls (m ³ /s)	At Vanderhoof (m ³ /s)	
10-Jul	49.0	57.0	192	88.2
11-Jul	49.0 to 227 @ 1600 hrs	56.2	191	86.6
12-Jul	227	56.5	190	86.6
13-Jul	227	70.0	184	85.0
14-Jul	227	88.3	190	83.4
15-Jul	227	109	204	81.8
16-Jul	227	126	228	80.3
17-Jul	227	140	244	78.8
18-Jul	227	156	262	78.8
19-Jul	227 to 170 @ 1000 hrs	168	276	75.8
20-Jul	170	174	287	74.3
21-Jul	170 to 453 @ 1600 hrs	175	297	71.4
22-Jul	453 to 14.2 @ 1600 hrs	183	298	70.0
23-Jul	14.2	212	300	67.2
24-Jul	14.2 to 170 @ 1000 hrs	191	326	67.2
25-Jul	170	171	317	64.6
26-Jul	170	168	294	63.4
27-Jul	170	168	283	62.1
28-Jul	170	169	281	59.8
29-Jul	170	170	285	61.0
30-Jul	170	171	282	57.5
31-Jul	170	170	280	56.4
01-Aug	170	171	278	55.2
02-Aug	170	170	277	54.1
03-Aug	170 to 453 @ 1600 hrs	170	276	51.8
04-Aug	453 to 14.2 @ 1600 hrs	179	276	52.9
05-Aug	14.2 to 453 @ 1600 hrs	210	277	50.6
06-Aug	453	197	306	48.5
07-Aug	453 to 283 @ 1400 hrs	235	304	48.5
08-Aug	283 to 14.2 @ 1600 hrs	266	326	48.5
09-Aug	14.2	264	361	46.4
10-Aug	14.2	231	374	45.4
11-Aug	14.2 to 170 @ 0900 hrs	197	350	43.3
12-Aug	170	175	314	43.3
13-Aug	170		292	42.3

Appendix C (continued)
Mean Daily Skins Lake Spillway Releases and Flows in the Nechako and Nautley River, 1999

Date	Skins Lake Spillway Release (m ³ /s)	Nechako River		Nautley Fort Fraser (m ³ /s)
		Cheslatta Falls (m ³ /s)	At Vanderhoof (m ³ /s)	
14-Aug	170	170	276	42.3
15-Aug	170	169	275	40.4
16-Aug	170	169	275	39.5
17-Aug	170 to 14.2 @ 1600 hrs	169	275	38.6
18-Aug	14.2	165	275	37.7
19-Aug	14.2	151	275	37.7
20-Aug	14.2	131	275	35.9
21-Aug	14.2	114	n/a	38.3
22-Aug	14.2	101	n/a	36.3
23-Aug	14.2	90.5	n/a	36.2
24-Aug	14.2	82.2	n/a	36.0
25-Aug	14.2	75.9	n/a	36.5
26-Aug	14.2	69.3	n/a	35.1
27-Aug	14.2	63.8	n/a	34.5
28-Aug	14.2	59.2	n/a	35.0
29-Aug	14.2	55.3	n/a	34.3
30-Aug	14.2	51.6	n/a	34.0
31-Aug	14.2 to 32.7 @ 1600 hrs	48.1	n/a	33.2
01-Sep	32.7	45.1	99.2	32.6
02-Sep	32.7	43.0	93.8	31.9
03-Sep	32.7	41.8	89.5	31.5
04-Sep	32.7	41.0	86.8	31.1
05-Sep	32.7	40.3	85.9	31.4
06-Sep	32.7	39.9	84.7	32.0

n/a - data not available

APPENDIX D
Observed and Forecast Meteorological Data

Appendix D
Observed and Forecast Meteorological Data

17.80	619.30	0.23	9.00	3.90	94.10	61.60	9 07 99
18.00	669.00	0.30	9.70	3.50	94.03	58.00	10 07 99
18.50	436.00	0.60	11.50	6.40	94.12	64.00	
17.00	372.50	0.70	13.00	11.00	93.94	77.00	
18.80	645.50	0.30	11.40	8.60	93.81	62.00	
18.60	567.00	0.45	12.10	5.00	93.80	66.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY

WORLD WEATHERWATCH FORECAST ISSUED JUL 10/99

20.00	534.10	0.58	9.20	6.10	94.00	53.50	10 07 99
20.40	480.00	0.62	10.00	2.40	94.00	53.00	11 07 99
18.00	480.00	0.65	9.20	10.00	93.90	57.00	
16.00	370.00	0.70	9.00	15.00	93.90	63.00	
17.00	450.00	0.60	9.50	10.00	94.00	60.00	
18.00	500.00	0.50	9.00	6.00	94.00	56.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY

WORLD WEATHERWATCH FORECAST ISSUED JUL 11/99

19.70	613.10	0.63	9.20	8.20	94.00	53.20	11 07 99
18.00	550.00	0.55	7.50	12.00	93.90	55.00	12 07 99
15.50	400.00	0.65	9.30	12.00	94.00	60.00	
16.50	480.00	0.50	9.50	9.00	94.00	58.00	
17.00	550.00	0.40	9.00	6.00	94.10	55.00	
16.50	610.00	0.30	8.50	5.00	94.70	53.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY

WORLD WEATHERWATCH FORECAST ISSUED JUL 12/99

16.10	525.60	0.26	4.80	11.10	94.00	48.30	12 07 99
13.70	550.00	0.34	4.80	6.30	93.70	55.00	13 07 99
13.50	400.00	0.70	7.00	15.00	93.70	69.00	
15.00	450.00	0.50	8.00	10.00	94.20	60.00	
16.00	550.00	0.35	8.50	6.00	94.50	53.00	
17.00	650.00	0.25	9.00	5.00	94.80	48.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY

WORLD WEATHERWATCH FORECAST ISSUED JUL 13/99

13.80	597.40	0.26	4.50	10.20	93.60	55.50	13 07 99
14.50	520.00	0.41	7.80	25.00	93.60	64.00	14 07 99
14.00	450.00	0.55	7.00	15.00	94.20	63.00	
15.50	550.00	0.40	8.00	8.00	94.50	53.00	
16.00	650.00	0.30	8.50	6.00	94.80	48.00	
16.50	600.00	0.35	9.00	5.00	94.50	51.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY

WORLD WEATHERWATCH FORECAST ISSUED JUL 14/99

Appendix D (continued)
Observed and Forecast Meteorological Data

14.20	329.40	0.60	5.90	26.10	93.60	58.90	14 07 99
11.80	520.00	0.43	1.00	20.00	94.10	47.00	15 07 99
13.00	580.00	0.35	4.00	8.00	94.00	53.00	
15.00	650.00	0.30	6.00	6.00	93.90	51.00	
16.50	600.00	0.35	7.50	4.00	93.80	53.00	
17.00	600.00	0.35	7.80	3.00	93.80	53.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 15/99							

11.90	478.90	0.46	0.70	22.60	94.10	48.10	15 07 99
12.30	650.00	0.25	3.00	10.00	93.80	53.00	16 07 99
14.50	600.00	0.30	5.00	6.00	93.70	53.00	
15.50	580.00	0.35	6.50	4.00	93.60	55.00	
16.50	580.00	0.35	7.00	3.00	93.60	55.00	
16.00	560.00	0.40	8.00	4.00	93.50	58.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 16/99							

12.60	732.00	0.08	2.40	9.00	93.80	52.60	16 07 99
13.90	610.00	0.15	6.00	4.00	93.70	57.00	17 07 99
15.50	590.00	0.20	7.00	4.00	93.80	55.00	
16.50	560.00	0.35	8.00	5.00	93.60	58.00	
15.50	490.00	0.50	9.00	5.00	93.50	60.00	
14.50	420.00	0.70	10.00	8.00	93.60	60.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 17/99							

14.70	643.10	0.23	5.70	3.80	93.60	59.40	17 07 99
16.50	570.00	0.20	9.00	3.00	93.80	60.00	18 07 99
16.00	560.00	0.30	10.00	4.00	93.70	58.00	
15.00	420.00	0.70	11.00	6.00	93.50	61.00	
15.50	440.00	0.60	10.00	8.00	93.60	60.00	
15.00	470.00	0.50	10.00	5.00	93.80	58.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 18/99							

17.80	702.00	0.19	8.20	4.00	93.50	56.90	18 07 99
20.00	650.00	0.20	12.00	5.00	93.30	60.00	19 07 99
15.50	420.00	0.70	11.00	7.00	92.80	70.00	
16.00	480.00	0.50	10.00	9.00	92.90	65.00	
16.00	500.00	0.40	9.50	5.00	93.10	60.00	
15.50	400.00	0.75	11.50	8.00	92.80	70.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 19/99							

Appendix D (continued)
Observed and Forecast Meteorological Data

20.10	645.10	0.28	9.50	8.80	93.30	52.70	19 07 99
17.10	300.00	0.90	12.00	6.00	93.00	70.00	20 07 99
17.00	490.00	0.60	10.00	9.00	93.10	65.00	
16.50	510.00	0.50	9.50	6.00	93.20	64.00	
16.00	370.00	0.80	11.50	8.50	93.00	73.00	
16.00	490.00	0.50	10.00	5.00	92.90	66.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 20/99							

18.50	540.80	0.62	10.70	4.40	93.00	62.00	20 07 99
20.00	620.00	0.50	9.50	7.00	93.20	57.00	21 07 99
16.50	530.00	0.60	10.00	7.00	93.30	64.00	
16.00	420.00	0.70	11.00	7.50	93.20	73.00	
17.00	540.00	0.40	9.00	5.00	93.00	63.00	
17.00	620.00	0.50	10.00	7.00	93.10	63.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 21/99							

19.50	680.80	0.35	8.90	12.00	93.20	55.60	21 07 99
16.00	390.00	0.80	10.50	5.00	93.30	65.00	22 07 99
16.00	450.00	0.60	11.00	6.00	93.50	65.00	
16.50	540.00	0.40	9.00	5.00	93.40	55.00	
17.00	580.00	0.40	9.50	7.00	93.40	50.00	
17.50	590.00	0.30	9.00	5.00	93.50	50.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 22/99							

14.20	249.50	0.81	10.40	10.00	93.40	78.70	22 07 99
15.00	480.00	0.50	7.50	7.50	93.60	56.00	23 07 99
15.50	520.00	0.40	7.00	7.00	93.20	55.00	
16.00	510.00	0.50	9.00	6.50	93.40	65.00	
16.00	480.00	0.50	10.00	6.50	93.30	65.00	
15.00	470.00	0.70	10.50	7.50	93.00	70.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 23/99							

13.80	616.40	0.51	6.80	5.70	93.50	65.30	23 07 99
14.50	480.00	0.50	6.00	6.00	93.50	55.00	24 07 99
15.50	525.00	0.35	7.50	5.50	93.30	55.00	
15.00	460.00	0.55	8.50	5.50	93.20	60.00	
14.50	440.00	0.60	9.00	7.00	93.10	65.00	
14.50	480.00	0.40	6.50	5.50	93.00	50.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 24/99							

Appendix D (continued)
Observed and Forecast Meteorological Data

12.40	521.70	0.59	5.90	6.50	93.40	67.00	24 07 99
13.50	540.00	0.45	6.00	6.00	93.50	55.00	25 07 99
14.00	460.00	0.60	7.00	6.00	93.40	60.00	
13.50	430.00	0.65	7.50	6.50	93.30	60.00	
14.00	500.00	0.40	6.00	6.00	92.90	55.00	
15.00	530.00	0.30	6.00	5.00	93.50	50.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 25/99							

13.70	425.00	0.68	6.30	7.00	93.50	64.00	25 07 99
14.50	465.00	0.75	8.00	4.00	93.60	65.00	26 07 99
14.00	430.00	0.75	8.00	6.50	93.00	65.00	
13.50	430.00	0.70	7.50	6.00	93.00	60.00	
14.50	540.00	0.30	6.00	5.50	93.30	55.00	
16.00	570.00	0.20	6.00	5.00	93.40	55.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 26/99							

16.70	467.19	0.82	8.90	7.00	93.50	61.00	26 07 99
17.50	440.00	0.75	10.50	8.00	93.00	65.00	27 07 99
15.50	370.00	0.85	9.50	8.00	92.70	70.00	
16.00	540.00	0.40	7.00	7.00	93.20	55.00	
16.50	590.00	0.20	6.00	5.50	93.80	50.00	
18.00	680.00	0.05	6.00	5.50	93.90	45.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 27/99							

17.00	212.80	0.93	11.90	8.70	93.10	72.70	27 07 99
15.00	210.00	0.95	12.50	10.00	92.70	88.00	28 07 99
15.50	520.00	0.50	8.00	7.00	93.10	60.00	
16.50	590.00	0.20	6.00	5.00	93.80	50.00	
17.50	660.00	0.10	6.50	5.00	94.00	45.00	
18.00	600.00	0.20	7.00	3.00	93.90	50.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 28/99							

14.80	126.60	0.99	13.40	8.80	92.80	91.80	28 07 99
14.00	520.00	0.40	7.50	10.00	93.20	62.00	29 07 99
15.50	590.00	0.30	6.00	6.00	93.90	50.00	
16.50	660.00	0.10	6.50	5.00	94.00	45.00	
17.00	600.00	0.20	7.00	3.00	93.70	50.00	
17.50	500.00	0.50	8.00	5.00	93.60	60.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 29/99							

Appendix D (continued)
Observed and Forecast Meteorological Data

13.50	628.40	0.49	7.00	10.70	93.40	66.70	29 07 99
11.50	450.00	0.55	7.50	6.50	94.10	70.00	30 07 99
14.50	640.00	0.15	6.50	4.50	94.00	55.00	
15.50	540.00	0.30	7.00	3.50	93.60	55.00	
15.50	500.00	0.50	8.00	5.00	93.70	60.00	
15.50	525.00	0.50	8.00	4.00	94.00	60.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 30/99							

12.20	482.00	0.55	7.10	5.60	94.10	73.30	30 07 99
13.00	600.00	0.20	6.50	9.00	94.20	65.00	31 07 99
15.00	540.00	0.25	6.50	6.00	93.90	55.00	
15.50	510.00	0.40	7.50	7.50	93.90	60.00	
16.00	525.00	0.35	7.00	5.00	94.00	55.00	
17.00	590.00	0.20	6.00	4.50	93.90	50.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED JUL 31/99							

15.27	478.70	0.30	6.50	4.37	93.90	60.00	31 07 99
14.50	560.00	0.25	6.50	12.00	93.80	60.00	01 08 99
15.50	530.00	0.30	7.00	6.00	94.00	60.00	
17.00	580.00	0.20	6.50	5.00	94.40	50.00	
17.00	620.00	0.15	6.00	4.50	93.90	50.00	
16.50	540.00	0.25	7.00	5.00	93.60	55.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 01/99							

15.50	655.80	0.25	6.50	10.80	93.80	55.00	01 08 99
15.50	610.00	0.05	9.00	3.00	94.00	70.00	02 08 99
17.00	620.00	0.10	8.00	3.00	94.20	60.00	
17.50	630.00	0.10	8.00	3.00	93.90	55.00	
16.50	580.00	0.25	7.50	4.00	93.60	55.00	
16.00	540.00	0.30	8.50	4.50	93.70	60.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 02/99							

16.40	640.40	0.06	9.00	3.90	94.20	64.00	02 08 99
17.00	640.00	0.20	10.00	4.00	94.20	65.00	03 08 99
17.50	610.00	0.25	9.50	4.00	93.80	65.00	
17.00	590.00	0.25	9.50	4.00	93.70	65.00	
16.50	570.00	0.30	9.00	3.50	93.30	65.00	
16.00	550.00	0.35	10.00	5.50	93.10	70.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 03/99							

Appendix D (continued)
Observed and Forecast Meteorological Data

18.00	588.90	0.12	9.70	3.90	94.20	62.80	03 08 99
19.00	640.00	0.15	10.30	5.00	93.70	57.00	04 08 99
18.00	580.00	0.25	10.50	6.00	93.40	62.00	
16.00	520.00	0.35	11.00	10.00	93.10	72.00	
16.50	550.00	0.30	10.50	8.00	93.30	67.00	
17.00	600.00	0.20	10.00	6.00	93.50	63.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 04/99							

19.80	589.69	0.35	11.10	5.70	93.80	61.50	04 08 99
22.50	540.00	0.48	13.80	5.00	93.40	58.00	05 08 99
20.00	570.00	0.45	13.00	10.00	93.20	63.00	
19.00	520.00	0.50	13.00	8.00	93.30	69.00	
17.50	570.00	0.40	11.50	7.00	93.40	67.00	
16.00	500.00	0.60	11.00	11.00	93.20	72.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 05/99							

22.00	603.80	0.58	13.60	4.60	93.50	60.80	05 08 99
19.80	540.00	0.33	14.10	9.00	93.10	70.00	06 08 99
19.00	520.00	0.50	13.00	8.00	93.30	69.00	
17.50	550.00	0.45	11.50	7.00	93.40	67.00	
16.00	480.00	0.60	11.00	11.00	93.20	72.00	
14.80	500.00	0.50	9.00	10.00	93.40	67.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 06/99							

19.90	500.90	0.40	14.20	8.50	93.10	73.00	06 08 99
20.70	550.00	0.39	14.10	7.00	93.00	66.00	07 08 99
19.00	580.00	0.35	12.80	9.00	93.20	65.00	
17.50	480.00	0.60	11.50	11.00	93.00	70.00	
15.50	500.00	0.50	9.50	9.00	93.30	67.00	
15.00	500.00	0.50	9.00	8.00	93.20	66.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 07/99							

19.80	515.70	0.55	14.30	5.80	93.00	72.50	07 08 99
19.30	600.00	0.39	12.00	14.00	93.30	63.00	08 08 99
18.00	500.00	0.50	11.50	10.00	93.30	66.00	
16.00	480.00	0.60	9.80	7.00	93.20	68.00	
15.50	510.00	0.50	9.00	8.00	93.30	65.00	
16.00	530.00	0.45	8.50	9.00	93.40	60.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 08/99							

Appendix D (continued)
Observed and Forecast Meteorological Data

19.90	495.00	0.48	11.10	13.20	93.30	60.50	08 08 99
18.00	440.00	0.55	9.00	7.00	93.50	57.00	09 08 99
15.50	420.00	0.60	10.00	5.00	93.20	70.00	
15.00	460.00	0.55	9.00	6.00	93.30	65.00	
15.80	400.00	0.70	11.00	12.00	93.20	75.00	
16.50	560.00	0.40	8.50	8.00	93.50	55.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 09/99							

18.10	519.70	0.69	8.80	3.30	93.50	56.10	09 08 99
15.50	460.00	0.45	9.00	1.50	93.20	60.00	10 08 99
15.00	450.00	0.50	10.00	5.00	93.10	65.00	
14.50	400.00	0.70	8.50	12.00	93.10	70.00	
15.50	540.00	0.45	8.00	6.00	93.20	55.00	
15.00	450.00	0.60	9.00	3.00	93.10	60.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 10/99							

16.50	524.60	0.52	8.50	2.90	93.20	61.70	10 08 99
13.80	320.00	0.70	8.90	17.00	93.20	72.00	11 08 99
12.00	200.00	0.85	9.00	8.00	93.20	80.00	
14.00	400.00	0.65	9.00	3.00	93.20	72.00	
15.00	450.00	0.60	9.00	5.00	93.30	67.00	
14.50	380.00	0.70	9.50	5.00	93.20	70.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 11/99							

13.20	170.60	0.71	9.90	14.50	93.20	80.50	11 08 99
12.50	120.00	0.88	9.70	3.00	93.60	83.00	12 08 99
14.50	400.00	0.65	9.00	3.00	93.30	70.00	
15.00	450.00	0.60	9.00	5.00	93.30	67.00	
14.50	380.00	0.70	9.50	5.00	93.20	70.00	
15.00	450.00	0.60	9.00	8.00	93.30	67.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 12/99							

13.30	294.90	0.85	9.80	2.30	93.50	80.30	12 08 99
14.90	350.00	0.67	9.80	2.50	93.40	72.00	13 08 99
15.00	400.00	0.50	9.00	3.00	93.20	67.00	
14.50	380.00	0.70	9.50	5.00	93.20	72.00	
15.00	400.00	0.60	9.50	8.00	93.30	70.00	
15.50	500.00	0.45	9.00	6.00	93.30	65.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 13/99							

Appendix D (continued)
Observed and Forecast Meteorological Data

15.30	464.40	0.58	9.50	0.70	93.40	71.20	13 08 99
16.40	600.00	0.20	9.10	7.00	93.00	62.00	14 08 99
15.50	400.00	0.65	9.50	5.00	93.00	67.00	
15.50	400.00	0.60	9.80	8.00	93.20	70.00	
16.00	500.00	0.45	9.30	6.00	93.30	65.00	
15.50	400.00	0.60	9.50	6.00	93.20	67.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 14/99							

16.50	462.10	0.25	8.50	8.80	92.90	63.10	14 08 99
14.20	275.00	0.84	10.40	5.00	93.00	78.00	15 08 99
15.50	350.00	0.65	9.80	6.00	93.40	70.00	
15.50	400.00	0.60	9.50	6.00	93.30	67.00	
15.50	400.00	0.60	9.50	6.00	93.20	67.00	
15.00	400.00	0.60	9.00	8.00	93.30	67.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 15/99							

13.70	198.30	0.84	10.20	6.40	93.00	80.50	15 08 99
15.30	450.00	0.50	9.50	15.00	93.50	75.00	16 08 99
14.00	380.00	0.70	10.00	7.00	93.50	75.00	
14.00	380.00	0.70	9.50	5.00	93.20	70.00	
13.50	410.00	0.60	9.00	5.00	93.30	60.00	
14.00	410.00	0.60	8.50	5.00	93.30	55.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 16/99							

15.20	455.30	0.53	8.70	12.00	93.70	68.50	16 08 99
15.80	430.00	0.55	9.00	10.00	93.80	60.00	17 08 99
15.00	380.00	0.75	9.50	5.00	93.30	70.00	
13.80	410.00	0.60	8.50	5.00	93.40	60.00	
14.00	420.00	0.60	8.00	6.00	93.50	55.00	
15.00	550.00	0.30	8.00	7.00	93.40	55.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 17/99							

16.90	206.70	0.49	9.60	10.40	93.70	64.90	17 08 99
17.50	510.00	0.35	10.50	8.50	93.30	70.00	18 08 99
15.70	310.00	0.80	10.00	6.00	93.30	78.00	
14.00	410.00	0.60	8.00	5.00	93.70	60.00	
13.80	450.00	0.50	7.50	7.00	93.40	55.00	
13.50	520.00	0.30	7.00	3.00	93.50	55.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY
WORLD WEATHERWATCH FORECAST ISSUED AUG 18/99							

Appendix D (continued)
Observed and Forecast Meteorological Data

18.10	457.70	0.26	9.90	5.80	93.40	64.80	18 08 99
19.20	450.00	0.50	10.00	5.00	93.40	65.00	19 08 99
19.60	420.00	0.60	10.00	4.00	93.30	60.00	
17.50	460.00	0.50	8.50	4.00	93.50	55.00	
16.50	530.00	0.30	7.50	3.00	93.50	50.00	
15.50	550.00	0.20	7.00	2.00	93.70	50.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY

WORLD WEATHERWATCH FORECAST ISSUED AUG 19/99

17.50	435.00	0.40	10.30	4.90	93.40	65.20	19 08 99
16.00	550.00	0.30	9.50	2.00	93.30	70.00	20 08 99
14.50	430.00	0.60	8.50	12.00	93.60	70.00	
14.00	530.00	0.40	8.00	8.00	94.00	60.00	
13.80	560.00	0.40	7.00	3.00	93.60	50.00	
15.00	560.00	0.40	8.50	4.00	93.50	55.00	
ATEMP(C)	RAD(LY)	CC(TTHS)	DPT(C)	SPD(KH)	SPR(KPA)	RH(%)	DD MM YY

WORLD WEATHERWATCH FORECAST ISSUED AUG 20/99

APPENDIX E

Summer Water Temperature and Flow Management Project Reservoir Release Volume Calculations for July 10 to August 20, 1999

